

Get Growing NFT 10K Commercial Bundle





growing solutions since 1	984		
et Growing! Commercial Bundle			1/1/:
ydroponics System:		Luminosa	
Plant Sites: Production:		Total sites Plants/week (6	week cycle)
Configuration:			- 50% of NFT sites
			50% of NFT sites
Green House:		Propagation (2 Standard size (2	wks All Propagation Sites) 1880sq ft.)
et Growing! Commercial Bundle		Quantity	Description
			·
ydroponics NFT 10K Kit: GroClean NFT Channel	Kit:	288	Gro Clean NFT Channel (12' Finishing Sections - HDPE)
			Gro Clean NFT Channel (12' Nursery Sections - HDPE)
Table Frames/Benching	g Kit:		10' Custom Table Frames
Collectors			10' Covered Collector
ManifoldsF ManifoldsN			10' Finishing Manifolds
Manifoldsin			10' Nursery Manifolds 10' Hybrid Manifolds
Pumps			1 HP pumps
Reservoir			1200gal Cistern w 15in Manhole Extension
Plumbing			PVC package to plumb in system & reservoir
Nutrient/H2O Control	Kit:	1	Water Meter
		1	Nutrient Controller w/Triple Peristaltic Pump
			pH probe EC/pH Handheld Meter
• • • • • •			
Propagation Kit:			Get Seeding 10 Tray Propagation system w/bottom heat - package Vacuum Seeder
			Lighting for propagation & nursery
Other Important Items	Kit:	1	30gal w Lid Nutrient Stock Tanks Kit
			5gal Acid Tank Kit
		4	Channel Scrub Brush and handle
			NFT tool kit
			1.5" Flexy drain
			Kerrick float valve kit Venturi Tee
AmHydro Services		2	Days supervision of AmHydro system installation
AmHydro Services			Days supervision of AmHydro system installation Plumbing design and plans
			Electrical panel with mounted controllers
			Annual Grower Support
			day site visit by AmHydro consultant
			Packing and Freight to customer
			Custom shipping Pallets
			Consulting for seed varieties and nutrients Tee-Shirts
Greenhouse		1	Green house structure - includes heater, vent motors, HAF fans, doors
			Environmental Controller (StepUP)
			CO2 burner & controller
		1	Ground Cover w/ anchor pins-15x300 roll
Pro Grower Subscription	on (3 months)		Seeds Variety
			Oasis LC1 5231 (Thin Cut)
			AmHydro Plant Specific Nutrients
			Essential Plus 1gal Buffer Solution pH 4&7 16oz
			Calibration Solution 27.7 16oz
			pH Down 10% 1 gal
			Plastic 'stakes' for labeling (4000 total stakes)
			Water Testing



Get Growing! Commercial 10K Bundle

Finishing Tables
Nursery Tables

Propagation Tables

NFT System Specifications

Harvest:

Crop Turn (CTT) - A number determined by harvested plants per year, per finishing plant site.

13 CTT - 1,296 plants per week (8 week harvest cycle)

17 CTT - 1,728 plants per week (7 week harvest cycle)

26 CTT - 2,592 plants per week (6 week harvest cycle)

System:

Finishing sites: 5,184 (288 channels)


Nursery sites: 5,184 (72 channels)

Propagation sites: 5,520 (10 trays)

Reservoir size: 1,200 gallons

Greenhouse square foot: 2,880

NFT growing area square foot: 2,040

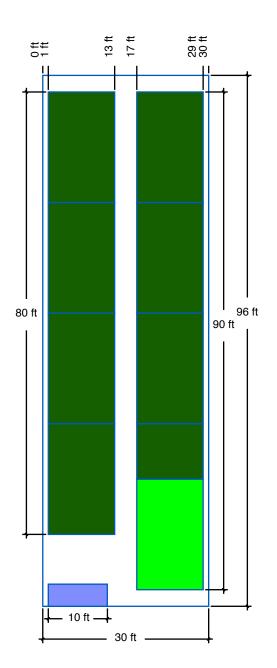



AmHydro's Get Growing - Commercial 10K Bundle

System Specifications

Total Square feet of NFT system:	2,040
Lineal feet of NFT system:	170
Water usage per day (Gallons):	486
Recommended reservoir size (Gallons):	1,200
Greenhouse size:	30x96
Number of bays:	1
Number of finishing plant sites:	5,184
Number of nursery plant sites:	5,184
Number of propagation plant sites:	5,520
	-

Projected harvest numbers per week

13 Crop turns per year (8 week seed to harvest):	1,296
	,
17.33 Crop turns per year (7 week seed to harvest):	1,728
26 Crop turns per year (6 week seed to harvest):	2,592
	_,





NFT System Details

Our AmHydro Pro NFT system has been used in the field for over 30 years and has been refined for ease of use, longevity and versatility.

Each NFT system is comprised of 10 foot modules that connect together to make desired table length. The *10K NFT System* uses 17 of these 10 foot modules.

Each AmHydro Pro NFT module is made from *five* components that have been designed and refined over 30 years.

TABLE FRAME - Table frames are made from 10ga to 18ga galvanized steel that come pre-drilled for ease of assembly. Table frames are put together using a 5/16" hex bit, power drill and speed square.

FEEDER - Each feeder manifold feeds a 10' section of table and is made from virgin LDPE plastic. These manifolds feed from the center for even pressure. Each manifold comes with a clean-out fitting on each end for maintenance and is controlled with a heavy duty PVC ball valve. Our leak-proof AmHydro grommet secures a 1/4" micro-tube for even delivery to each AmHydro channel. No glue is required when assembling feeder for ease of assembly and maintenance.

COLLECTOR - Each covered collector returns nutrient water from a 10' section of table and is made from duel-wall LDPE pipe. Collectors have a hinged cover to keep sunlight off draining end of channels. No glue is required when assembling collector for ease of assembly and maintenance. Our AmHydro Drip Cap is attached, in conjunction with each collector, to eliminate leaks.

FINISHING CHANNEL - Finishing channels are 144" long and come with 1.75" holes on 7.75" center's. There are 18 holes per channel. Our channels are made from 100% virgin FDA approved HDPE.

NURSERY CHANNEL - Nursery channels are 144" long and come with 1.6875" holes on 2" center's. There are 72 holes per channel. These channels are also made from 100% virgin FDA approved HDPE. Both channel types are ready to use, right off the pallet.



Tank House Components

The tank house components are the heart of the NFT system. These components can be housed inside the working greenhouse or in a separate building we term as head house. We can source the main reservoir, 1,200 gallon - below grade, but usually recommend the grower to source due to shipping requirements.

INTELLIDOSE CONTROLLER (ID) - The ID takes care of your reservoir so you don't have to. This unit will monitor the pH and Nutrient concentration (EC/CF) of your working solution and make the necessary adjustments.

STOCK TANKS - Nutrient stock tanks are made from thick HDPE and will last a lifetime. pH stock tank is made to withstand breakdown form acidity of pH adjuster.

PUMP - The *10K NFT System* uses (1) 1HP pump. We use Max-E-Pro centrifugal pumps made by Sta-Rite for durability and longevity. We always include an extra pump.

FLOAT VALVE AND WATER METER - Float valve is a 3/4", 37 GPM Kerick valve and the water meter measures how much water your system is using per day/week.

Propagation System

We have a handful of propagation systems. The *10K NFT System* utilizes the Get Seeding 10-tray Propagation System. This system is the perfect size and most importantly, provides the necessary number of propagation sites to feed your nursery channels. All of our propagation systems are recirculating and use our commercial grade AmHydro propagation trays (cMPT). The Get Seeding 10-tray Propagation System is a stand-alone system that come complete with everything required

The propagation stage is one of the most important as it sets the pace for your harvest times. Strong seedlings make for quicker crop turns. The *10K NFT System* comes with a bottom heat package to keep your seedling at optimum temperature.



Growing Supplies

NUTRIENTS - Our mineral fertilizers are manufactured right here at AmHydro and have been used in the field for over 25 years. Our two-part powders are made from the purest commercial grade minerals that follow California's strict guidelines on standards and quality. The *10K NFT System* comes with a 3 month supply (8 cases).

GROWING MEDIUM - We offer exclusively Oasis propagation cubes manufacture my Smithers Oasis. We have found them to be the most reliable and consistent and the easiest to work with. The *10K NFT System* comes with 1" thin-cut Oasis.

BUFFERS - Standard 4&7 buffers for calibrating pH probes on DBC controllers and hand-held meters as well as standard 27.7 calibration solution for CF probes.

pH ADJUSTER - Standard food grade 10% pH down and pH up.

WATER TESTING - The *10K NFT System* comes with (3) water tests. One will be used in the very beginning to see if water treatment is necessary. The remaining (2) are for monitoring the nutrient balance within the recirculating NFT system.

SEEDS - The *10K NFT System* comes with high quality, pelleted seeds. We provide enough for 3 months supply.

Growers Support - The AmHydro Advantage™

All AmHydro systems are designed and manufactured to be the best in the industry. The equipment purchase, however, is only a first step in setting up a successful hydroponics business. That is why the *10K NFT System* come with AmHydro Advantage[™], a specialized service and support program aimed at giving you the information you need.

Grower/Technical Support: American Hydroponics provides the grower with growing and technical support regarding any phase of the Hydroponic System for a twelve-month period commencing the date the customer receives system. Grower and technical support will be provided through faxes, email, Skype, and/or telephone communication. Our support covers installation assistance of the hydroponic system and includes advice/recommendations related to seed selection, propagation techniques, crop turn strategy, ergonomics, nutrient/water/tissue analysis, problem resolution, environmental control, how to anticipate and address upcoming climate change adjustments, packaging and general marketing strategies. Our goal is to maximize crop production at every stage and assist growers in becoming competent and successful in their growing operation. Extra charges for site visit, travel, custom parts and systems.



Luminosa Greenhouse Model LD



SCOPE OF PROPOSAL: This proposal is for the supply of a Harnois Luminosa gutter style Greenhouse, complete with pre-engineered structure with the following specifications and scope of work:

Number of Buildings Building Style Width Gutter Height Length Area Arch Spacing Post Spacing 1 Bay - gutter connected Nordique 30 feet 12 feet 96 feet 2,880 square feet 6 feet 12 feet









Design

- Commercial Greenhouses generally fall under the greenhouse section of the Farm Building Code section of the international Building Code.
- The Luminosa Greenhouse exceeds the requirements of this section of code.
- The Luminosa with he oval arches spaced every 6 feet, has the following load specs: Max Snow Load: 35 pounds per foot squared Max Wind Load: 115 MPH - 3 second gusts Design loads as per ASCE7-10 (American Society of Civil Engineers) 2010
- If the greenhouses will be used for other purposes other than the growing of commercial plants, we should be notified. Other applications such as storage, retail garden center, etc., where the general public has access, might require higher load requirements.
- If you have any doubts about the load requirements that your greenhouse will need to conform to, you should contact your local authorities (Regional district/ building inspector/ City Hall etc.)

The Luminosa Gothic shape provides the following benefits

- Simpler and easier to build; Columns in two parts, minimize the number of bolts.
- Steel protected inside and out after drilling with "Galvalume" and clear coated, no black markings on coverings.
- Stronger 1 piece gutter support.
- More width options, 14 foot, 16 foot, 18 foot, 21 foot 4 inch, 24 foot, 25 foot, 28 foot, 30 foot and 31 foot 6 inch and 36 foot.
- More snow and wind load options (10 pounds to 15 pounds per square foot and higher).
- Crop support for specific crop: 1-1/4 inch or 1-3/8 inch, webbed supports, energy truss.
- Standard gutter Heights: 10 foot, 12 foot, 14 foot, 16 foot, 18 foot.
- New forty five degree top bay for more light, less dripping on crop.
- Luminosa with larger oval tube (2-3/4 inches by 1-5/8 inches or 2 inches x 3-9/16 inches) offers higher snow load capacities with better light transmission and less shadowing.
- Bolt fasteners: Alkaline, zinc/nickel for high strength/corrosion resistant performance.



Foundation

• STANDARD FOUNDATION KITS: Anchor 3 1/2 inch square post, 11 gauge spaced 12 foot c/c base plate for existing concrete, Installed with Hilti anchor bolts.

Structural Components

- ONE 30 FOOT WIDE HIGH PROFILE 45 DEGREE TOP BAY FOR 8MM DOUBLE-WALLED POLYCARBONATE COVERING: Including oval tube ribs (2 inch by 3-9/16 inch) spaced every 6 foot, galvanized steel sub structure, aluminum base and cap mouldings, diagonals for each corner, cross ties, nuts, bolts and attachments.
- TWO SIDE WALLS WITH GUTTERS FOR 8MM DOUBLE-WALLED POLYCARBONATE COVERING: Including 3-1/2 inch square post - 11 gauge and hot dipped, spaced every 12 feet apart, 12 gauge gutters with gutter/post supports, horizontal purlins (1.25 inch by 1.25 inch), steel baseboard, aluminum profiles, nuts, bolts and attachment X-bracing, gutter drain, nuts, bolts and attachments.
- TWO GABLE ENDS FOR 8MM DOUBLE-WALLED POLYCARBONATE COVERING: Including vertical oval tube posts with anchor tubes, horizontal purlins (1.25 inch by 1.25 inch), steel baseboard, aluminum profiles, nuts, bolts and attachments, top vinyl flashing.
- TWO HEAVY DUTY GUTTER TO END WALL BRACING: Rectangular tube bracing, allows for end wall support under crop to wind loads.

Doors

- ONE EACH DOUBLE SLIDING DOOR KITS: for steel end walls, 8 foot wide by 8 foot tall, consisting of two sliding doors, of galvanized steel construction, complete with track, supports, stoppers, wheels, and all nuts and bolts.
- ONE SERVICE DOOR: Overall dimension: 35-/8 inches wide by 82-38 inches tall insulated door. With frame, hinges, handle and key locking hardware.



Side wall vent panel

- ONE CONTINUOUS 4 FOOT WIDE SIDEWALL VENT SYSTEM: Aluminum top and bottom sills and rails, galvanized vertical steel stiffeners, screws and enclosure for glazing. Double toothed steel rack and Pinion's, including couplings and shaft brackets. Includes coupling and shaft hangers and stop collars.
- ONE MOTORIZED KIT: for vent, includes Ridder Motor/gearbox, relay kit and motor starter.

Single roof vent panel

- ONE CONTINUOUS 4 FOOT WIDE RIDGE VENT PANEL: Aluminum top/bottom sills in rails, galvanized vertical steel stiffeners, screws and closures for glazing. Double tooth steel rack and Pinion's, including couplings and shaft brackets. Includes couplings, shaft hangers and stop collars.
- ONE MOTORIZATION KIT: for ridge vent, includes Ridder motor/gearbox, relay kit and motor starter

Covering materials

- ROOF SECTION: Lexan 8mm twin-walled polycarbonate glazing with anti-condensate, as required to cover one complete roof with venting panel.
- END WALLS: Lexan 8mm twin-walled polycarbonate glazing with anti-condensate, as required to cover two complete end walls.
- SIDE WALLS: Lexan 8mm twin-walled polycarbonate glazing with anti-condensate, as required to cover two complete side walls.

Equipment

- MODINE UNIT HEATERS: Temperature design needed before recommending size of heater unit
- 4 HAF AIR DISTRIBUTION SYSTEM: 20 inch diameter, horizontal air flow fans, 3 speed high velocity.
- OVER HEAD THERMAL/SHADE CURTAINS: using BJ85 with the following characteristics, 85% shading, 57% energy saving, 15% light transmission, UV treated. This is a truss to truss system with good air tightness along the truss and on the sides. Motors and straight racks are controlling the movement of the shade curtain.

Please read carefully

• Not included in the above quotation: erection, controls, site preparation, post hole digging, foundation cement, electrical and gas hookups, permits, unloading, etc...